

Specifier's Reference

Project

Type

Model No.

Comments or Special Instructions

EPIC'S EP-2820-4Z-WMC RF REMOTE

SPECIFICATIONS

SENDER: EP-2820-4Z-WMC

Operation voltage: 12-24VDC

Operation frequency: 434MHZ / 868MHZ

Size(mm): 86x86x41

RECEIVER: MODEL: EP-1009-EA-4Z-CVC

Input voltage: 12-36VDC

Output voltage: 12-36VDC

EP-1009-EA-4Z-CVC: 4 channels x 5A, 4channels x (60-180W) - Constant Voltage

RECEIVER: EP-1009-350-EA-4Z-CCC

Input voltage: 12-36VDC

Output voltage: 12-36VDC

EP-1009-350-EA-4Z-CCC: 4 channels x 700mA, 4 channels x (4.2-12.6W) - Constant Current

RECEIVER: EP-1009-1000-EA-4Z-CCC



Input voltage: 12-36VDC

Output voltage: 12-36VDC

EP-1009-1000-EA-4Z-CCC: 4 channels x 1000mA, 4 channels x (8.4-25.2W) - Constant Current



EP-2820-4Z-WMC touch panel (For RGBW) is high sensitive glass touch panel, which has 4 different zones. It can get Red/ Green/ Blue/ White color directly. The wall mounted controller can save up to 4 colors or 4 modes into corresponding buttons (1-4 buttons) for each zone. You can choose any color through color wheel. any finishing color could be customized. This wall switch suit for any RGB or RGBW LED lightings for home club bar etc.

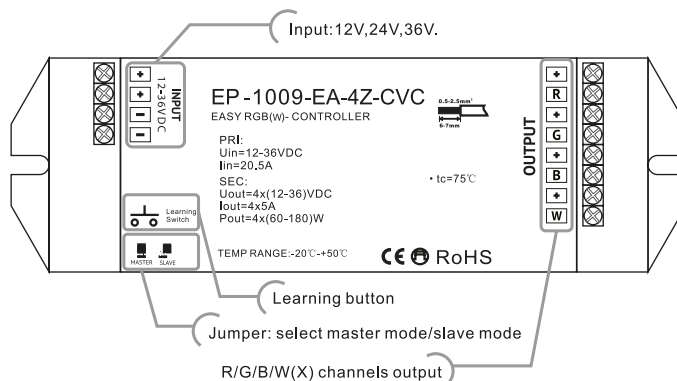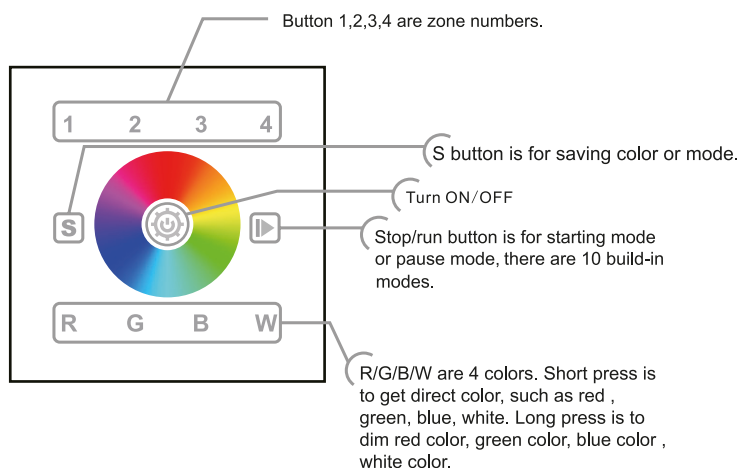

Ordering Information

PRODUCT

SENDER: (MODEL: EP-2820-4Z-WMC)

RECEIVER: (MODEL: EP-1009-EA-4Z-CVC) CONSTANT VOLTAGE or

RECEIVER: (MODEL: EP-1009-700-EA-4Z-CCC) CONSTANT CURRENT or

RECEIVER: (MODEL: EP-1009-1000-EA-4Z-CCC) CONSTANT CURRENT

